

ÖZELLİKLER

Ürün Kodu ve Adı: SP-22 Panjur Alıcı
Kanal Sayısı: 2 Kanallı
Frekans: 433,92 MHZ
Çalışma Voltajı: 220 V AC 50HZ
Kontak Çıkışı: 220 V -10 A 2200 W ,2 Yönlü motorlarda kullanılabilir
Kumanda Kayıt: Rolling Code:30, FixCode: 42 adet şifre tanıtılabilir
Kod Yapısı: Rolling Code - FixCode
Harici Buton Girişi: Mevcut
Sesli Uyarı: Mevcut
Kullanım Alanı: Panjur, Kepenk, Otomasyon

FAZ - NTR

Alıcınızın 220V AC 50Hz besleme girişleridir.Faz ve nötr bağlantılarını yaparken kısa devre olmayacak şekilde kablo bağlantıları yapılmalıdır.

YKR - ORT - ASG

Monofaze motor giriş uçlarıdır. Motorun Yukarı-Ortak-Aşağı uçları alıcıya denk gelen YKR-ORT-ASG giriş uçlarına doğru bir şekilde bağlanmalıdır. Alıcının motor çıkış uçları yaklaşık 5 dk çıkış vermektedir.

KUMANDA TANITMA


Tanıtılmak istediğiniz kumandanın tuşuna basılı tutarak alıcı kart üzerindeki yükleme butonuna basınız. Yükleme esnasında led ışığı flaş yapacaktır. Yükleme başarılı olduğunda led ışığı sönecektir. Alıcınızda yükleme yapılmadıysa (hafızasında şifre yok ise) led ışığı yanıp sönerek uyarı verir. Bu durumda kumandayı tekrar tanıtmayı deneyiniz.

HAFIZA SİLME

Kart üzerindeki PRG butonuna basılı tutarak alıcıya enerji verildiğinde,alıcınızın hafızasındaki yüklü şifreler silinir.

HARİCİ BUTON GİRİŞİ

Alıcıya bağlı motoru manuel olarak kontrol etmek isterseniz, CN2 girişine Normalde Açık buton takılmalıdır. Buton girişlerine kesinlikle enerji vermeyiniz.

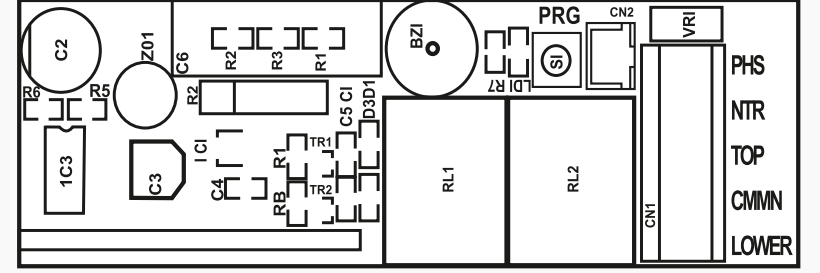

TECHNICAL SPECIFICATIONS

Product Code and Name: SP-22 Receiver
Channel Number: 2 Channels
Frequency: 433,92 MHZ
Operating Voltage: 220 V AC 50HZ
Power Consumption: 220 V -10 A, 2200 W can be used 2 directional engines
Remote Controller Record: Ability to define up to Rolling Code:30, FixCode: 42 different passwords
Code Structure: Rolling Code - FixCode
External Button Input: Available
Audible Warning: Available
Area of Usage: Window shade, shutter, automation

PHASE-NEUTRAL (PHS-NTR)

Phase and Neutral are 220V AC 50Hz supply inputs of the receiver: Cable connections shall be realized by eliminating any short-circuit while making phase and neutral connections.

TOP- COMMON- LOWER (TOP-CMMN-LOWER)

Top-Common-Lower are mono-phase motor input leads. Top-Common-Lower leads of the motor shall be connected to TOP-COMMON-LOWER input leads which correspond to the receiver, correctly. Motor output leads of the receiver nearly provide 5 minutes output.

MATCH TO REMOTE WITH RECEIVER

To match remote with receiver, You should press button which you want to match with receiver button at same time. While it is matching light will be flasing. When match done light will be off.If it does not match Receiver with remote, led light will be flashing. You should try again to match ."

MEMORY DELETION

When the receiver is energized by pressing down the loading button, loaded passwords in the memory of the receiver are deleted.

EXTERNAL BUTTON INPUT

If you want to manually control the motor which is connected to the receiver, Normally Open button shall be installed at CN input. Never energize button inputs.